


This document describes the product specification of CR2+PTC battery supplied by Titanium Innovations, INC.


### Dimensions:

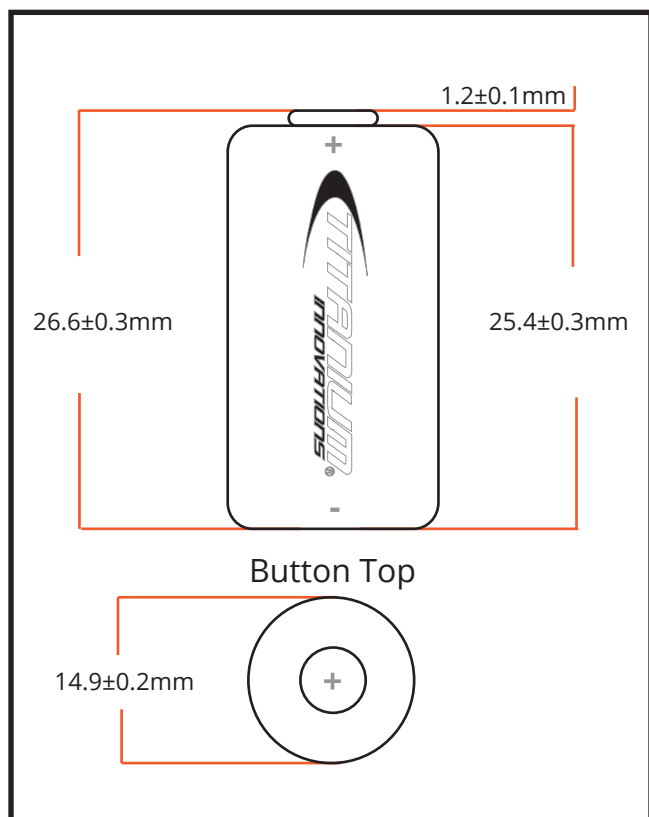


### Specifications:

System	Li-Manganese Dioxide	
Capacity	750 mAh	800 mAh
Discharge Current	45 mA	20 mA
Discharge End-Point Voltage	2.0V	
Rated Voltage	3.0V	
Cell Weight	Approx. 10.5±0.5g	
Operating Temperature	-40°C ~ 60°C	
Storage Temperature	10°C ~ 25°C	
Storage Life	10 Years	


Discharge Characteristics (I) Current: 45mA-cont

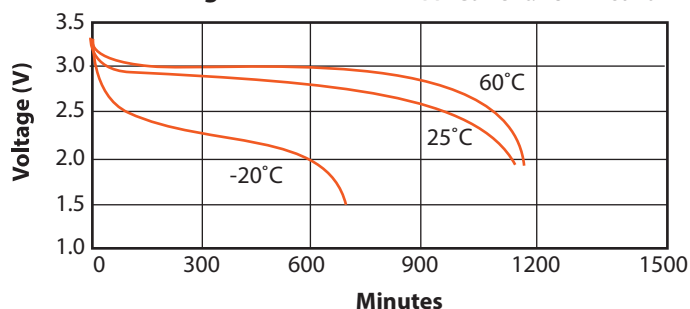

Discharge Characteristics (II) Current: 800mA-cont

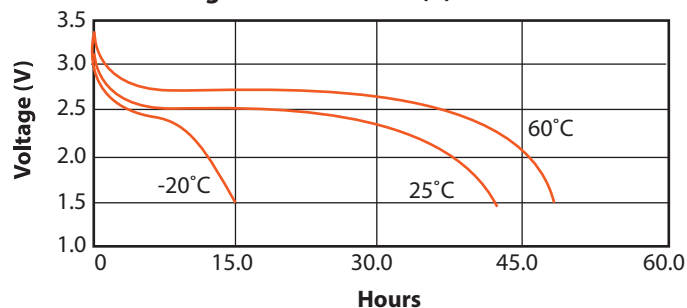

Discharge Characteristics (III) Load: 0.9A/3sec. on/27sec. off

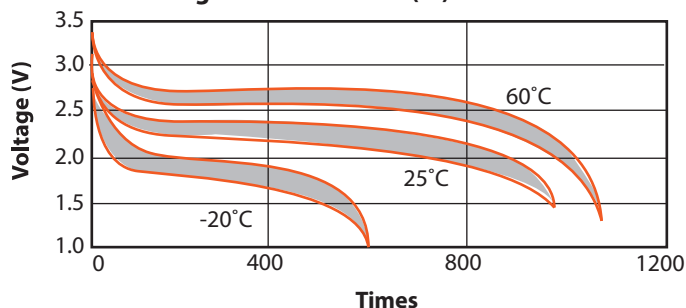

Made in PRC



### Important Notices

This datasheet contains typical information specific to products manufactured at the time of its publication.