





报告编号

# **UN38.3 Test Report** UN38.3 测试报告

**Client Name** 

委托单位

Dongguan Olight E-Commerce Technology Co.,

东莞市傲雷移动照明设备有限公司

4th Floor, Building 4, Kegu Industrial Park, No 6 Zhongnan Road, Changan Town, Dongguan

**Address** 

地址

City, Guangdong, China.

东莞市长安镇上沙社区中南南路 6 号科谷工业园 4

栋第四层

**Product Name** 

产品名称

RECHARGEABLE LITHIUM-ION BATTERY

可充电锂离子电池

Date

Aug. 16, 2022

2022年08月16日 日期

**Shenzhen Anbotek Compliance Laboratory Limited** 深圳安博检测股份有限公司

深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东 电话: (86) 0755-26066126 传真: (86) 0755-26066021

邮箱: service@anbotek.com







Report No.: 18270BC20240101 报告编号

Page 2 of 16 第 2 页 共 16 页

# 1. SAMPLE DESCRIPTION 样品描述:

Sample Name: 样品名称	ION	CHARGEABLE LITHIU I BATTERY E电锂离子电池	M- Sample Mo 样品型号	101	Anborel
Manufacturer: 制造商	14	ngguan Ang'yue Elec 医市昂跃电子有限公司		Anbotek Anb	nbotek And
Address of manufactur 制造商地址	Sha	Floor, Block A4, Kegu Ingsha Community, Ch E市长安镇上沙社区中區	nang'an Town Doi	ngguan City	an Road,
Factory: エ厂		ngguan Ang'yue Elec E市昂跃电子有限公司	tronics Co., LTD	Anbotek Anbotek	tek Anbor
Address of factory: 工厂地址	Sha	Floor, Block A4, Kegu Ingsha Community, Ch E市长安镇上沙社区中區	nang'an Town Doi	ngguan City	an Road,
Nominal Voltage: 3. 标称电压	7V	Rated Capacity: 额定容量	6500mAh 24.1Wh	Trademark: 商标	/ Anbotek
Charge Current: 13 充电电流	300mA	Maximum Continuous Charge Current: 最大持续充电电流	6500mA	End Charge Current: 充电截止电流	130mA
Cut-off Voltage: 2.8 终止电压	5V	Maximum Continuous Discharge Current: 最大持续放电电流	13000mA	Limited Charge Voltage: 充电限制电压	4.2V
Cells Number: 1 内含电芯个数	rek Anb	Cell Model: 电芯型号	32650	Cell Rated Capacity: 电芯额定容量	6500mAh
Date of Sample Receiv 样品接收日期	100	g. 03, 2022 2 年 08 月 03 日	Anbotek Anbotek	Anbotek abotek	Anbotek
Date of Test: 检测日期		g. 03, 2022 to Aug. 15, 2年08月03日至20		botek Anbotek	Anbotes*

Tested by: 检测

Checked by: 审核

Approved by:

批准

地址: 广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021 邮箱: service@anbotek.com







报告编号

Page 3 of 16 第 3 页 共 16 页

# 2. REFERENCE METHOD 参考方法

UN "Manual of Tests and Criteria" ST/SG/AC.10/11/Rev.7/Amend.1/Subsection 38.3 联合国《试验和标准手册》(第 7 版修订 1)38.3 节

## 3. EQUIPMENT LIST 设备清单

01 = 0.01 m=1 m=1 0.1 % H 11.1		
Name of equipment /Model 设备名称/型号	Serial No. 编号	Due Date 校准有效期
Altitude Simulation Testing Machine	Anbo	otek
模拟高空低压试验箱	SE-132	2023-03-02
BE-DY-125	bii.	aboter
100,		
快速温变箱	SE-1488	2023-07-01
ZJ-KSWB1506 Electromagnetic Vibration Testing Machine	Anbore, Ann	
Electromagnetic Vibration Testing Machine		
电磁式振动试验机	SE-439	2022-09-26
EV103		
Shock Testing Machine		
机械冲击台	SE-440	2023-02-20
HSKT-10		
High Temperature Short Circuit Test Chamber		
高温短路试验箱	SE-4071	2023-05-15
同価应对以沙相 KY-CS50 Impact Testing Machine		
impact resting wachine		
冲击试验机	SE-136	2023-06-29
BE-5060 High-performance battery detection system		
7 mg. p - 1/2 manney a dentary		
高性能电池检测系统	SE-4122	2023-05-22
CT-4004-20V50A-NFA		
DC Power Supply		
可程式直流电源	SE-4355	2023-07-10
IPS900B-15-60		
Temperature and humidity indicator 温湿度计	And	potek
	SE-1188	2023-03-04
温湿度计 HTC-1 Temperature and humidity indicator		
	OF 4400	2222
init Cir./X VI	SE-1189	2023-03-04
TRUE RMS multimeter		
	SE-2010	2023-05-15
	SE-2010	2023-05-15
台式万用表 MS8040 Electronic Balance 由之王巫		
由之工亚	SE-534	2023-02-20
DTT-0+200		2023-02-20
100		
	SE-004	2023-03-02
温升记录仪 34970A	AUDO.	2023-03-02
OTO TOTAL		

深圳安博检测股份有限公司

地址: 广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021邮箱: service@anbotek.com

Hotline 400-003-0500 www.anbotek.com.cn





Page 4 of 16 报告编号 页 共 16 页

#### 4. ENVIRONMENTAL CONDITIONS OF THE TEST 环境条件

Temperature: (20±5) °C R.H.: (25~75) %RH

温度 相对湿度

## 5. TEST ITEM AND CONCLUSION 测试项目及结论

ITEM 测试项目	SAMPLE NUMBER 样品编号	STANDARD 执行标准	CONCLUSION 结论
Altitude simulation 高度模拟	Aupotek Aupor	sek anbotek Ant	经测试,该样品符
Thermal test 热测试	ak Anbotek Ant	otek Anbotek	合联合国《试验和标准手册》(第7
Vibration 振动	B1~B5, B6~B10	inbo hotek Anbotek	版修订 1) 38.3 节 标准要求
Shock 冲击	Anbotek Anboten	ST/SG/AC.10/11/Rev.	The sample has
External short circuit 外部短路	Anbotek Anbote	7/Amend1	passed the items of UN "Manual of
Impact 撞击	C1~C5, C6~C10	tek Anbotek Anb	Tests and Criteria"
Overcharge 过度充电	B11~B14, B15~B18	botek Anbotek	ST/SG/AC.10/11/ Rev.7/Amend1/Su
Forced discharge 强制放电	C11~C20, C21~C30	Anbotek Anbotek	bsection 38.3

Notes 说明:

B1~B5: Single cell Batteries at first cycle in fully charged states;

为第1个充放电周期完全充电状态的单电芯电池;

B6~B10: Single cell Batteries after 25 cycles ending in fully charged states;

为第25个充放电周期后完全充电状态的单电芯电池;

B11~B14: Single cell batteries at first cycle in fully charged states;

为第1个充放电周期完全充电状态的单电芯电池;

B15~B18: Single cell batteries after 25 cycles ending in fully charged states;

为第25个充放电周期后完全充电状态的单电芯电池;

C1~C5: Cells at first cycle at 50% of the design rated capacity;

为第1个充放电周期50%设计额定容量状态的电芯;

C6~C10: Cells at 25 cycle at 50% of the design rated capacity;

为第25个充放电周期50%设计额定容量状态的电芯;

C11~C20: Cells at first cycle in fully discharged states;

为第1个充放电周期完全放电状态的电芯;

C21~C30: Cells after 25 cycles ending in fully discharged states.

为第25个充放电周期后完全放电状态的电芯。

电话: (86) 0755-26066126

邮箱: service@anbotek.com

Code: AB-AB-131-a

400-003-0500 www.anbotek.com.cn





报告编号

Page 5 of 16 第 5 页 共 16 页

#### 6. TEST METHOD 测试方法

Tests T.1 to T.5 shall be conducted in sequence on the same cell or battery. Tests T.6 and T.8 shall be conducted using not otherwise tested cells or batteries. Test T.7 may be conducted using undamaged batteries previously used in tests T.1 to T.5 for purposes of testing on cycled batteries. In order to quantify the mass loss, the following procedure is provided:

Mass loss(%) =  $(M_1-M_2) / M_1 \times 100$ 

Where M<sub>1</sub> is the mass before the test and M<sub>2</sub> is the mass after the test. When mass loss does not exceed the values in Table blow, it shall be considered as "no mass loss".

小型电芯或电池必须按顺序进行试验 T.1 至 T.5。试验 T.6 和 T.8 应使用未另外试验过的电芯或电池。试验 T.7 可以使用原先在试验 T.1 至 T.5 中使用过的未损坏电池进行,以便测试交替充电放电过的电池。

质量损失依照下式计算:

质量损失(%)= (M<sub>1</sub>-M<sub>2</sub>)/M<sub>1</sub> \*100

式中 M<sub>1</sub> 是试验前的质量, M<sub>2</sub> 是试验后的质量。如质量损失不超过下表所列数值,即视为"无质量损失"。

Mass M of cell or battery 电芯或电池质量 M	Mass loss limit 质量损失限值
M<1g	0.5%
1g≤M≤75g	0.2%
M>75g	0.1%

#### T.1 Altitude simulation

Test cells and batteries shall be stored at a pressure of 11.6 kPa or less for at least six hours at ambient temperature ( $20 \pm 5$  °C).

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

#### T.1 高度模拟

试验电芯和电池应在压力等于或低于 11.6 千帕和环境温度为(20°±5°C) 下存放至少 6 小时。要求电芯和电池无渗漏、无排气、无解体、无破裂、无起火,并且每个试验电芯或电池在试验后的开路电压不小于其在进行这一实验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电芯和电池。

#### T.2 Thermal test

Test cells and batteries are to be stored for at least six hours at a test temperature equal to  $72 \pm 2^{\circ}$ C, followed by storage for at least six hours at a test temperature equal to  $-40 \pm 2^{\circ}$ C. The maximum time interval between test temperature extremes is 30 minutes. This procedure is to be repeated until 10 total cycles are complete, after which all test cells and batteries are to be stored for 24 hours at ambie nt temperature ( $20 \pm 5^{\circ}$ C). For large cells and batteries the duration of exposure to the test temperature extremes should be at least 12 hours.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

T.2 热测试

试验电芯和电池应先在试验温度等于 72±2°C 的条件下存放至少 6 小时,接着再在试验温度等于-40±2°C 的条件下存放至少 6 小时。两个极端试验温度之间的最大时间间隔为 30 分钟。此程序重复进

深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021

邮箱: service@anbotek.com







报告编号

Page 6 of 16 第 6 页 共 16 页

行,完成 10 次,接着将所有试验电芯和电池在环境温度(20±5℃)下存放 24 小时。对于大型电芯和电池,暴露于极端试验温度的时间至少应为 12 小时。

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在试验 后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电 芯和电池。

#### T.3 Vibration

Cells and batteries are firmly secured to the platform of the vibration machine without distorting the cells in such a manner as to faithfully transmit the vibration. The vibration shall be a sinusoidal waveform with a logarithmic sweep between 7 Hz and 200 Hz and back to 7 Hz traversed in 15 minutes. This cycle shall be repeated 12 times for a total of 3 hours for each of three mutually perpendicular mounting positions of the cell. One of the directions of vibration must be perpendicular to the terminal face. The logarithmic frequency sweep shall differ for cells and batteries with a gross mass of not more than 12 kg (cells and small batteries), and for batteries with a gross mass of more than 12 kg (large batteries).

For cells and small batteries: from 7 Hz a peak acceleration of 1  $g_n$  is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 8  $g_n$  occurs (approximately 50 Hz). A peak acceleration of 8  $g_n$  is then maintained until the frequency is increased to 200 Hz.

For large batteries: from 7 Hz to a peak acceleration of 1 gn is maintained until 18 Hz is reached. The amplitude is then maintained at 0.8 mm (1.6 mm total excursion) and the frequency increased until a peak acceleration of 2  $g_n$  occurs (approximately 25 Hz). A peak acceleration of 2  $g_n$  is then maintained until the frequency is increased to 200 Hz.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire during the test and after the test and if the open circuit voltage of each test cell or battery directly after testing in its third perpendicular mounting position is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

#### T.3 振动

电芯和电池紧固于振动机平台,但紧固程度不能造成电芯变形以致不能准确传递振动。振动应是正弦波形,对数频率扫描从 7 赫兹和 200 赫兹,再回到 7 赫兹,跨度为 15 分钟。这一振动过程须对三个相互垂直的电芯安装方位的每一方向重复进行 12 次,共为时 3 小时。其中一个振动方向必须与端面垂直。

作对数式频率扫描,对总质量不足 12 千克的电芯和电池(电芯和小型电池),和对 12 千克及更大的电池(大型电池)有所不同。

对电芯和小型电池:从 7 赫兹开始,保持 1  $g_n$  的最大加速度,直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米(总位移 1.6 毫米),并增加频率直到最大加速度达到 8  $g_n$ (频率约为 50 赫兹)。将最大加速度保持在 8  $g_n$  直到频率增加到 200 赫兹。

对大型电池: 从 7 赫兹开始,保持 1  $g_n$  的最大加速度,直到频率达到 18 赫兹。然后将振幅保持在 0.8 毫米(总行程 1.6 毫米)并增加频率直到最大加速度达到 2  $g_n$ (频率约为 25 赫兹)。将最大加速度保持在 2  $g_n$  直到频率增加到 200 赫兹。

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在第三个垂直安装方位上的试验后立即测得的开路电压不小于在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电芯和电池。

#### T.4 Shock

Test cells and batteries shall be secured to the testing machine by means of a rigid mount which will support all mounting surfaces of each test battery.

Each cell shall be subjected to a half-sine shock of peak acceleration of 150 g<sub>n</sub> and pulse duration of 6 milliseconds. Alternatively, large cells may be subjected to a half-sine shock of peak acceleration of 50 g<sub>n</sub> and pulse duration of 11 milliseconds.

深圳安博检测股份有限公司

邮箱: service@anbotek.com

Code: AB-AB-131-a

Hotline 400-003-0500 www.anbotek.com.cn





报告编号

Page 7 of 16 第 7 页 共 16 页

Each battery shall be subjected to a half-sine shock of peak acceleration depending on the mass of the battery. The pulse duration shall be 6 milliseconds for small batteries and 11 milliseconds for large batteries. The formulas below are provided to calculate the appropriate minimum peak accelerations.

Battery 电池	Minimum peak acceleration 最小峰值加速度	Pulse duration 脉冲持续时间
Anbottek anbotek	150 g <sub>n</sub> or result of formula	oo kek nootek
Small batteries 小型电池	Acceleration(gn)= $\sqrt{\frac{100850}{\text{mass}*}}$	Anborek 6 ms Anborek
tek abotek Anbo	whichever is smaller	abotek Anbo
unbo. A. Arboti	50 g₁ or result of formula	k notek anbote
Large batteries 大型电池	Acceleration(gn)= $\sqrt{\frac{30000}{\text{mass}^*}}$	11 ms
k hotek Anbore	whichever is smaller	

<sup>\*</sup> Mass is expressed in kilograms.

Each cell or battery shall be subjected to three shocks in the positive direction and to three shocks in the negative direction in each of three mutually perpendicular mounting positions of the cell or battery for a total of 18 shocks.

Cells and batteries meet this requirement if there is no leakage, no venting, no disassembly, no rupture and no fire and if the open circuit voltage of each test cell or battery after testing is not less than 90% of its voltage immediately prior to this procedure. The requirement relating to voltage is not applicable to test cells and batteries at fully discharged states.

#### T.4 冲击

试验电芯和电池用坚固支架紧固在试验机上,支架支撑着每个试验电池的所有安装面。

每个电芯须经受最大加速度 150 gn 和脉冲持续时间 6 毫秒的半正弦波冲击。不过,大型电芯需须经受最大加速度 50 gn 和脉冲持续时间 11 毫秒的半正弦波冲击。

每个电芯须经受半正弦波冲击的峰值加速度取决于电池的质量。对小型电池的脉冲持续时间为6毫秒,对大型电池的脉冲持续时间为11毫秒。上面的公式用于计算合适的最低限度最大加速度。

每个电芯或电池须在三个相互垂直的电芯或电池安装方位的正极方向经受三次冲击,接着在负极方向经受三次冲击,总共经受 18 次冲击。

要求电芯和电池无渗漏、无排气、无解体、无破裂和无起火,并且每个试验电芯或电池在试验 后的开路电压不小于其在进行这一试验前电压的 90%。有关电压的要求不适用于完全放电状态的试验电 芯和电池。

#### T.5 External short circuit

The cell or battery to be tested shall be shall be heated for a period of time necessary to reach a homogeneous stabilized temperature of 57±4°C, measured on the external case. This period of time depends on the size and design of the cell or battery and should be assessed and documented. If this assessment is not feasible, the exposure time shall be at least 6 hours for small cells and small batteries, and 12 hours for large cells and large batteries. Then the cell or battery at 57±4°C shall be subjected to one short circuit condition with a total external resistance of less than 0.1 ohm. This short circuit condition is continued for at least one hour after the cell or battery external case temperature has returned to 57±4°C, or in the case of the large batteries, has decreased by half of the maximum temperature increase observed during the test and remains below that value.

The short circuit and cooling down phases shall be conducted at least at ambient temperature.

Cells and batteries meet this requirement if their external temperature does not exceed 170°C and

Cells and batteries meet this requirement if their external temperature does not exceed 170°C and there is no disassembly, no rupture and no fire during the test and within six hours after the test. T.5 外部短路

深圳安博检测股份有限公司

Code: AB-AB-131-a

Hotline 400-003-0500 www.anbotek.com.cn





报告编号

Page 8 of 16 第 8 页 共 16 页

对于待试电芯或电池,应加温一段必要的时间,使从外壳测量的温度达到均匀的稳定温度 57±4°C,这段时间的长短取决于电芯或电池的大小和设计,对于这个持续时间应加以评估和记录。如无 法进行这种评估,则小型电芯或电池的暴露时间应至少持续 6 小时,大型电芯或电池的暴露时间应至少持续 12 小时。然后,电芯或电池在 57±4°C 下经受总外电阻小于 0.1 欧姆的短路条件。

这一短路条件应在电芯或电池外壳温度回到 57±4℃ 后持续至少 1 小时,或在大电池的情况下外壳温度降幅达试验中所观察的最高温升幅的二分之一并保持低于此温度值。

短路和降温阶段应至少相当于环境温度。

要求电芯和电池外壳温度不超过 170°C, 并且在试验过程中及试验后 6 小时内无解体,无破裂,无起火。

#### T.6 Impact / Crush

Impact (applicable to cylindrical cells greater than 18 mm in diameter)

The sample cell or component cell is to be placed on a flat smooth surface. A  $15.8 \pm 0.1$ mm diameter, at least 6 cm long, or the longest dimension of the cell, whichever is greater, Type 316 stainless steel bar is to be placed across the centre of the sample. A  $9.1 \pm 0.1$  kg mass is to be dropped from a height of  $61 \pm 2.5$  cm at the intersection of the bar and sample in a controlled manner using a near frictionless, vertical sliding track or channel with minimal drag on the falling mass. The vertical track or channel used to guide the falling mass shall be oriented 90 degrees from the horizontal supporting surface.

The test sample is to be impacted with its longitudinal axis parallel to the flat surface and perpendicular to the longitudinal axis of the 15.8  $\pm$  0.1mm diameter curved surface lying across the centre of the test sample. Each sample is to be subjected to only a single impact.

Crush (applicable to prismatic, pouch, coin/button cells and cylindrical cells not more than 18 mm in diameter)

A cell or component cell is to be crushed between two flat surfaces. The crushing is to be gradual with a speed of approximately 1.5 cm/s at the first point of contact. The crushing is to be continued until the first of the three options below is reached.

- (a) The applied force reaches  $13 \pm 0.78$  kN;
- (b) The voltage of the cell drops by at least 100 mV; or
- (c) The cell is deformed by 50% or more of its original thickness.

Once the maximum pressure has been obtained, the voltage drops by 100 mV or more, or the cell is deformed by at least 50% of its original thickness, the pressure shall be released.

A prismatic or pouch cell shall be crushed by applying the force to the widest side. A button/coin cell shall be crushed by applying the force on its flat surfaces. For cylindrical cells, the crush force shall be applied perpendicular to the longitudinal axis.

Each test cell or component cell is to be subjected to one crush only. The test sample shall be observed for a further 6 h. The test shall be conducted using test cells or component cells that have not previously been subjected to other tests.

Cells and component cells meet this requirement if their external temperature does not exceed 170°C and there is no disassembly and no fire during the test and within six hours after this test. T.6 撞击/挤压

撞击(适用于直径不小于18毫米的圆柱形电芯)

试样电芯或组成电芯放在平坦光滑的表面上,一根 316 型不锈钢棒横放在试样中心,钢棒直径 15.8 ± 0.1 毫米,长度至少 6 厘米,或电芯最长端的尺度,取二者之长者。将一块 9.1 ± 0.1 千克的重锤 从 61 ± 2.5 厘米高处跌落到钢棒和试样交叉处,使用一个几乎没有摩擦的、对落体重锤阻力最小的垂直轨道或管道加以控制。垂直轨道或管道用于引导落锤沿水平支撑表面呈 90 度落下。

接受撞击的试样,纵轴应与平坦表面平行并与横放在试样中心的直径 15.8 ± 0.1 毫米弯曲表面的纵轴垂直。每一试样只经受一次撞击。

挤压 (棱柱形、袋装、硬币/纽扣电芯和直径小于 18 毫米的圆柱形电芯)

将电芯或组成电芯放在两个平面之间挤压,挤压力度逐渐加大,在第一个接触点上的速度大约为 1.5 厘米/秒。挤压持续进行,直到出现以下三种情况之一:

(a) 施加的力量达到 13 ± 0.78 千牛顿;

#### 深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021

邮箱: service@anbotek.com







报告编号

Page 9 of 16 第 9 页 共 16 页

(b) 电芯的电压下降至少 100 毫伏;或

(c) 电芯变形达到原始厚度的 50%或以上。

一旦达到最大压力、电压下降 100 毫伏或更多,或电芯变形至少达原厚度的 50%,即可解除压力。

棱柱形或袋装电芯应从最宽的一面施压。纽扣/硬币形电芯应从其平坦表面施压。圆柱形电芯应从与纵轴 垂直的方向施压。

每个试样电芯或组成电芯只做一次挤压试验。试样应继续观察 6 小时。试验应使用之间未做过其他 试验的电芯或组成电芯进行。

要求电芯或组成电芯外壳温度不超过 170°C, 并且在试验过程中及试验后 6 小时内无解体,无起火。

#### T.7 Overcharge

The charge current shall be twice the manufacturer's recommended maximum continuous charge current. The minimum voltage of the test shall be as follows:

- (a) When the manufacturer's recommended charge voltage is not more than 18V, the minimum voltage of the test shall be the lesser of two times the maximum charge voltage of the battery or 22V.
- (b) When the manufacturer's recommended charge voltage is more than 18V, the minimum voltage of the test shall be 1.2 times the maximum charge voltage.

Tests are to be conducted at ambient temperature; the duration of the test shall be 24 hours. Rechargeable batteries meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

#### T.7 过度充电

充电电流必须是制造商建议的最大持续充电电流的两倍。试验的最小电压如下:

- (a)制造商建议的充电电压不大于 18 伏时,试验的最小电压应是电池最大充电电压的两倍或 22 伏两者中的较小者;
  - (b)制造商建议的充电电压大于 18 伏时,试验的最小电压应为最大充电电压的 1.2 倍。试验应在环境温度下进行,进行试验的时间应为 24 小时。

要求可充电电池在试验过程中和试验后7天内无解体,无起火。

#### T.8 Forced discharge

Each cell shall be forced discharged at ambient temperature by connecting it in series with a 12V D.C. power supply at an initial current equal to the maximum discharge current specified by the manufacturer. The specified discharge current is to be obtained by connecting a resistive load of the appropriate size and rating in series with the test cell. Each cell shall be forced discharged for a time interval (in hours) equal to its rated capacity divided by the initial test current (in ampere).

Primary or rechargeable cells meet this requirement if there is no disassembly and no fire during the test and within seven days after the test.

#### T.8 强制放电

每个电芯应在环境温度下与 12 伏直流电源串联在起始电流等于制造商给定的最大放电电流的条件下强制放电。

将适当大小和额定值的电阻负荷与试验电池串联,计算得出给定的放电电流。对每个电池进行强制放电,放电时间(小时)应等于其额定容量除以初始试验电流(安培)。

要求原电芯或可充电电芯在试验过程中和试验后7天内无解体,无起火。

深圳安博检测股份有限公司

地址: 广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021 邮箱: service@anbotek.com

Hotline 400-003-0500 www.anbotek.com.cn






报告编号


Page 10 of 16 第 10 页 共 16 页

## 7. TEST PROCEDURE 测试程序

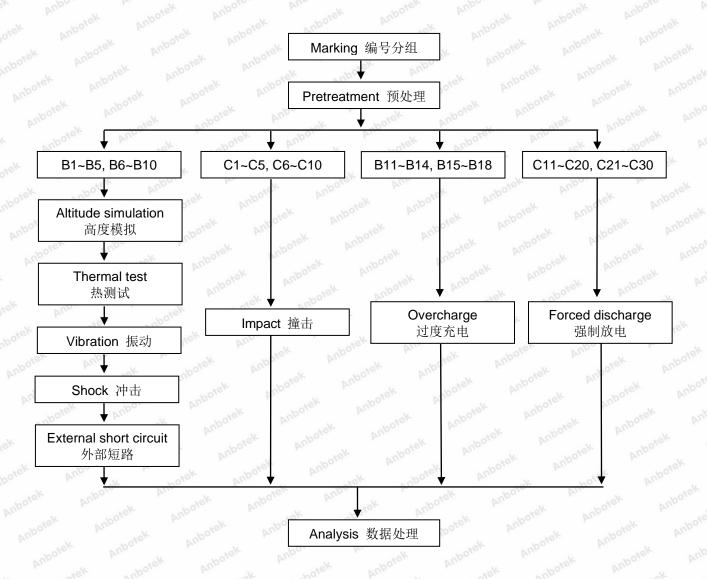

深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021 邮箱: service@anbotek.com









报告编号

Page 11 of 16 第 11 页 共 16 页

## 8. DATA 测试数据

## T.1 Altitude simulation 高度模拟

No.	Pre-test	测试前	After tes	t 测试后	Mass	Voltage	Whether leakage,
编号	Mass	Voltage	Mass	Voltage	loss	loss	venting,
And	质量	电压	质量	电压	质量亏损	电压亏损	disassembly,
Aupore	克(g)	伏(V)	克(g)	伏(V)	(%)	(%)	rupture, fire (Y/N)
. Yo	rek An	bo, , , b	rek	anbote		d. 40	有无渗漏,排气,解
V. Vier		botek	Anbo	n ote		Pierr	体,破裂和起火(是
rek a	abore	Die.	hotek	AUPO	100	Yer.	<b>/</b> 否)
B1	150.621	4.175	150.621	4.174	0.00	0.02	ntek N anbore
B2	151.037	4.172	151.024	4.172	0.01	0.00	And N ste
B3	150.913	4.178	150.901	4.178	0.01	0.00	abote N And
B4	150.672	4.171	150.672	4.170	0.00	0.02	N/k N/o
B5	150.761	4.173	150.761	4.172	0.00	0.02	Aup N M
B6	151.453	4.177	151.453	4.176	0.00	0.02	Notek p
₩ B7	150.694	4.179	150.686	4.179	0.01	0.00	NA PK
B8	150.613	4.176	150.613	4.176	0.00	0.00	atek Naboro
B9	150.758	4.179	150.736	4.178	0.01	0.02	no N stell
B10	150.692	4.175	150.692	4.175	0.00	0.00	aboter N And

#### T.2 Thermal test 热测试

No.	Pre-test	测试前	After tes	it 测试后	Mass	Voltage	Whether leakage,
编号	Mass	Voltage	Mass	Voltage	loss	Loss	venting,
400	质量	电压	质量	电压	质量亏损	电压亏损	disassembly,
b. br	克(g)	伏(V)	克(g)	伏(V)	(%)	(%)	rupture, fire (Y/N)
motek	Anbo. (o	IN.	abote	Pur		hotek	有无渗漏,排气,解
JUD K	hotek	Aupo.	by	rek on		"Up	体,破裂和起火(是
Aupote	Anto	rod.	ek Anb	D. by		Vupose.	/否)
B1	150.621	4.174	150.598	4.158	0.02	0.38	Moo'N N
B2	151.024	4.172	150.995	4.156	0.02	0.38	Niek or
B3	150.901	4.178	150.876	4.163	0.02	0.36	NOW Y
B4	150.672	4.170	150.629	4.157	0.03	0.31	tek Nipote
B5 M	150.761	4.172	150.731	4.155	0.02	0.41	N yek
B6	151.453	4.176	151.422	4.159	0.02	0.41	hotek N Anbo
B7	150.686	4.179	150.654	4.163	0.02	0.38	An otek
B8	150.613	4.176	150.588	4.162	0.02	0.34	Vupos N Vis
B9	150.736	4.178	150.713	4.164	0.02	0.34	oteN anbox
B10	150.692	4.175	150.665	4.161	0.02	0.34	And N ,

深圳安博检测股份有限公司

地址: 广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021邮箱: service@anbotek.com

Hotline 400-003-0500 www.anbotek.com.cn





报告编号

Page 12 of 16 第 12 页 共 16 页

T.3 Vibration 振动

No.	Pre-test	测试前	After tes	t 测试后	Mass	Voltage	Whether leakage,
编号	Mass	Voltage	Mass	Voltage	loss	Loss	venting,
hotek	质量	电压	质量	电压	质量亏损	电压亏损	disassembly,
AUR	克(g)	伏(V)	克(g)	伏(V)	(%)	(%)	rupture, fire (Y/N)
anbore	Arre	40.	hotek	Anbo	A. atek	Anbore	有无渗漏,排气,解
pa-		pote	ine ok	botek	Anbo	be.	体,破裂和起火(是
Sk Vup,	, M.	Nek	Anbore	Vien	600	ek Anb	/否)
B1	150.598	4.158	150.579	4.158	0.01	0.00	aboten Nambe
B2	150.995	4.156	150.995	4.156	0.00	0.00	wek N spore
B3	150.876	4.163	150.865	4.162	0.01	0.02	Aupo, N M
B4	150.629	4.157	150.629	4.157	0.00	0.00	" Melal Aupo.
B5	150.731	4.155	150.731	4.154	0.00	0.02	And Nk
B6	151.422	4.159	151.401	4.158	0.01	0.02	- And An
B7	150.654	4.163	150.654	4.163	0.00	0.00	N <sub>atel</sub> t ,
B8	150.588	4.162	150.588	4.161	0.00	0.02	NA PIN
B9	150.713	4.164	150.693	4.164	0.01	0.00	Lok Naboter
B10	150.665	4.161	150.665	4.160	0.00	0.02	upo, Ny, *ek


## T.4 Shock 冲击

Peak acceleration: 150 gn, Pulse duration: 6 ms 峰值加速度: 150 gn, 脉冲时间: 6 ms

No.	Pre-test	:测试前	After tes	t 测试后	Mass	Voltage	Whether leakage,
编号	Mass	Voltage	Mass	Voltage	ov loss	Loss	venting,
rek	质量	电压	质量	电压	质量亏损	电压亏损	disassembly,
upo	克(g)	伏(V)	克(g)	伏(V)	(%)	(%)	rupture, fire (Y/N)
aboven	Anbio	-01	ek anb	Die . Die	You	abover	有无渗漏,排气,解
Mr.	abote	AND	A.	hotek.	Aupor	bi.	体,破裂和起火(是
Aupor	br.	in You	poter p	'Up	hotek	Anbo	/否)
B1	150.579	4.158	150.579	4.158	0.00	0.00	ek Ann
B2	150.995	4.156	150.982	4.155	0.01	0.02	N noter
→ B3	150.865	4.162	150.846	4.162	0.01	0.00	oo N
B4	150.629	4.157	150.629	4.156	0.00	0.02	niek Nanbore
B5	150.731	4.154	150.715	4.154	0.01	0.00	And N nek
B6	151.401	4.158	151.401	4.158	0.00	0.00	abote N Anu
anb B7	150.654	4.163	150.654	4.162	0.00	0.02	N abo
B8	150.588	4.161	150.588	4.161	0.00	0.00	Wupo, N
B9	150.693	4.164	150.677	4.163	0.01	0.02	K Nek M
B10	150.665	4.160	150.665	4.160	0.00	0.00	An'N ak

深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021 邮箱: service@anbotek.com



Code: AB-AB-131-a

400-003-0500 www.anbotek.com.cn





报告编号

Page 13 of 16 第 13 页 共 16 页

#### T.5 External short circuit 外部短路

No. 编号	Peak temperature (°C) 最高温度	Whether disassembly, rupture, fire (Y/N) 有无解体,破裂,起火(是/否)
hotek B1 Anbor	57.2	And K Mr Anbor An
B2	57.5	K abote And N k sotek Ant
B3	57.3	Mark Night Will Will Will Will Will Will Will Wil
B4	57.6	Jores And W N Jores Andors
B5	57.8	tek above Name k watek
B6 AT	57.9	Anbo stek N anbore And ak
B7	57.4	abover Anbo N stek Anbove
B8	57.6	And the solution N And the solution
B9 , 300 <sup>46</sup>	57.5	Anbot And Anbote And
B10 B10	57.7	k botek Anbo N stek nob

#### T.6 Impact 撞击

760.	W. M.
Peak temperature (°C) 最高温度	Whether disassembly, fire (Y/N) 有无解体,起火(是/否)
23.4	boten And N stek Anbot
24.5	Ar aboth And
23.6	Anbor An Nek abore An
24.7	K POLSK AUD W. SSK
24.8	Notek Anbou
23.9	stek anbore N ak worker
23.5	upo stek Nuboro Am
24.2	botek Anbo N stek Anbore
24.6	All Lok boter N And
23.8	Anbor And aboter And
	最高温度 23.4 24.5 23.6 24.7 24.8 23.9 23.5 24.2 24.6

## T.7 Overcharge 过度充电

	No. 编号	napo	b.	in rak	Whethe	er disass	seml	oly, fire (Y/N	1) Hek	Aupo,	
OFER		V.	-otek		有无	上解体,	起火	oly, fire (Y/N (是/否)			-otek
Hot.	B11	by.	10	Lotek	Anb	0,	N	Yes	abote	Dil	No.
upo.	B12	rek	Vupole.	VUE	No.	hotek	N	Anbo	b.	rek	Vupote.
-40%	B13		rek	Napo	100	1111	N	botek	Anbe		- 01
De.	B14	poter	DUDO	V-	-orek	Pupo,	N	Air	۲ ,	10010h	DUD
ant	B15	, ek	200	le. bi	Up.	100	N	Vupo.	be	494	
	B16	Aupo.	16.	rek	Mpole	Ville	N	N N	rek	Aupo	100
	B17	,00	Gr DIL	100	otel	- 6	No	Dir	10.	tod.	34
lek-	B18	bre.	*ek	aboter	VUP	1	N	otek a	upor	bre.	*ek

深圳安博检测股份有限公司

Code: AB-AB-131-a

Hotline 400-003-0500 www.anbotek.com.cn






报告编号

Page 14 of 16 第 14 页 共 16

## T.8 Forced discharge 强制放电

hore	Alle		401	2000	Pr.	No	1010	Dille	400	361
abotel	No. 编	号	Anbo	Anbor	Wheth 有习	er disasse E解体,起	mbly, fire 火(是/否	(Y/N)	poter	Anbo
bry.	C11	Vupoter	Pup	40	ootek	N	<u> </u>	otek	Anboren	Nuc
AUD	C12	hotek	Anbo	Pr.	Yer	Node	PU	-V-	hotel	r DUI
. N	C13	Vier	. Y.	otek	Aupo.	N	rek	Vupote	Vien	No.
V-	C14	Anboy	Di.	You	, boje	PVN	v.	otek	Anb.	5,0
IS.	C15	V.	otek	Aupo,	br.	,ex N	aboter	AUD	V.	Lotek
Yer	C16	b.	Yan	hotek	Anbi	N	-tek	nupo'	b. b	'Un
100	C17	Note.	anbore	bir.	No	boyen N	Anbo		otek	Anboro
aboyer	C18	. Au	wotek.	Vupo,	b	N year	abore	P.C.	V-	work!
br.	C19	abote	VUL		otek	Mupo, N	br.	He/F	nboto.	NUC
Anbo	C20	rek	Pupos.	Pu	Non	Noch	Aup		r wetek	dag
	C21	AUDO	4	otek	rupo,	bu. N	No.	poter	VUD	No.
bri	C22	abot <sup>i</sup>	V. Vu	) 	notek	Wag	P P	No.	0000	to.
e <sub>K</sub>	C23	- Pro-	re/L	abolio	Aur	N N	botek	Vupo.	. P.	-Nek
No.	C24	e VUL		- tek	Pupo,	N	Non	100	SIL VI	100
00,	C25	-Yer	-boise	Ano		notek N	Aupo,	br.	, eV	Choler
Potok	C26	0.	No.	anbore	b's.	N	lofods.	Anl	20.	h.
YL.	C27	Apolek	Anbo	y	Het	popote, N		, V	190'ser	Anbo
Pupo,	C28	70K	hote	AUD		NoteN	15.3.1	DV-	bi.	065
	C29	Pupo,	br.	Yer	aborer	Anbo N		-Hotek	Aupo,	br.
VU	C30	-010	dna	P	No.	Non	b.	Un	0	ek a











报告编号

Page 15 of 16 第 15 页 共 16 页


## 9. PHOTOS OF THE SAMPLE 样品照片


#### Battery 电池

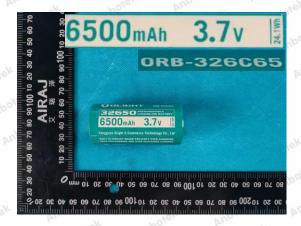

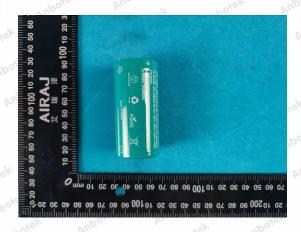

#### Cell 电芯

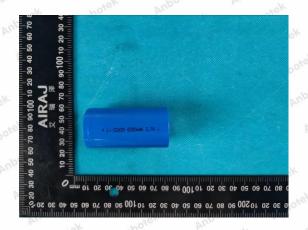

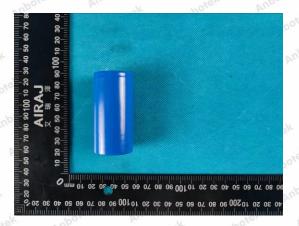

P

Hotline 400-003-0500 www.anbotek.com.cn





报告编号

Page 16 of 16 第 16 页 共 16 页

# **DECLARATION**

## 声明

 Reference documents for the testing: UN "Manual of Tests and Criteria" ST/SG/AC.10/11/Rev.7/Amend.1/Subsection 38.3

测试参考文件: 联合国《试验和标准手册》(第7版修订1)38.3节

Test place Lab: Shenzhen Anbotek Compliance Laboratory Limited
 Address: East of 4/F., Building A, Hourui No.3 Industrial Zone, Xixiang Street,
 Bao'an District, Shenzhen, Guangdong, China

测试实验室: 深圳安博检测股份有限公司

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东

3. This report shall not be revised and deleted.

本报告不能修改和删除。

- 4. The test results presented in this report are only relevant to the test sample. 本报告出现的试验结果仅与试验样品有关。
- This report shall not be published as advertisement without the approval of Shenzhen Anbotek Compliance Laboratory Limited.

本报告在未经深圳安博检测股份有限公司书面许可情况下不能用于宣传、广告之用。

6. This report shall not be copied partly without the written approval of Shenzhen Anbotek Compliance Laboratory Limited.

除非全部复制,否则无深圳安博检测股份有限公司书面批准本报告不得部分复制。

-- End of report --

-- 报告结束 --

地址:广东省深圳市宝安区西乡街道后瑞第三工业区A栋四楼东电话: (86) 0755-26066126 传真: (86) 0755-26066021 邮箱: service@anbotek.com

Hotline 400-003-0500 www.anbotek.com.cn

