


ALKALINE-MANGANESE DIOXIDE BATTERY PACK



Size: PXBP-STYLE-B

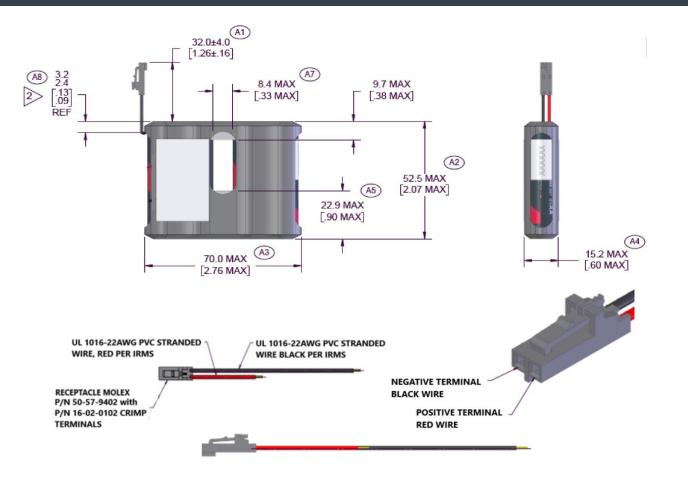

Dimensions (millimeter [inch])

Zn / MnO₂



KEY FEATURES

- **Reliable Performance** .
- Excellent resistance to corrosion
- Designed to meet all major quality, safety . and environmental standards:
 - o Safety: IEC 60086-5
 - ANSI C 18.1M, Part-2 0
 - EU Battery Directive 2006/66/EC 0
 - EU REACH / California Prop 65 0

TYPICAL APPLICATIONS

- Keyless Door Locks
- IC Card Hotel Locks
- **RF Card Locks**
- **Digital Door Locks** .

ELECTRICAL CHARACTERISTICS

•	Nominal capacity (25 mA Cont., 3.2V cut-off)	3,112 mAh
	Typical Voltage (at + 20 °C)	6 V

- Typical Voltage (at + 20 °C) AC Impedance @ 1kHz
 - 335 mΩ

PHYSICAL CHARACTERISTICS

•	Typical weight	110 g (3.88 oz)
•	Typical volume	45.1 cm ³ (2.75 in ³)
•	Terminals	Molex 50-57-9402, 16-02-0102

OPERATING & STORAGE CONDITIONS

. (Operating temperature range	-20°C
	oporating temperature range	(-4°F 1


Recommended Storage (storage area should be clean, cool, dry and ventilated)

C to 54°C to 130°F)

(41°F to 86° F)

5°C to 30°C

TYPICAL PERFORMANCE

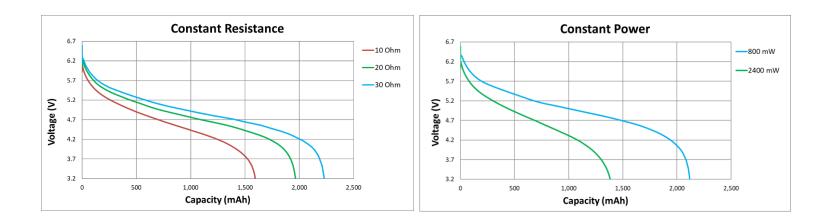





PROFESSIONAL BATTERIES **Procell Professional Batteries** Berkshire Corporate Park Phone: 1-877-277-6235 (Toll-free) www.procell.com

Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Procell for the latest information.



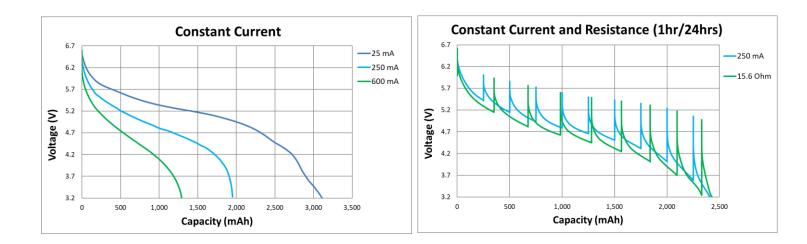

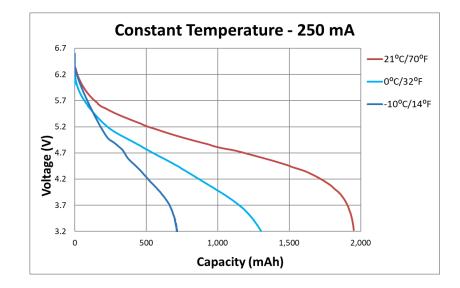



PROFESSIONAL BATTERIES Procell Professional Batteries Berkshire Corporate Park Phone: 1-877-277-6235 (Toll-free) www.procell.com Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Procell for the latest information.