



UN38.3 测试报告

UN38.3 Test Report

样品名称:	可充电锂离子电池 ARB-L14-800
Sample Name	Rechargeable Li-ion Battery ARB-L14-800
型号规格:	ARB-L14-800 3.6V 800mAh 2.88Wh
Model:	
委托单位:	深圳市朗恒电子有限公司
Applicant:	SHEN ZHEN LANG HENG ELECTRONIC CO.,LTD
检验项目:	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电
Test Items:	Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge
检验类别:	委托检验
Test Category:	Commission test

北京迪捷姆空运技术开发有限公司

Beijing DGM Air Transport Technology Co., Ltd.

北京迪捷姆空运技术开发有限公司
Beijing DGM Air Transport Technology Co., Ltd.
UN38.3 测试报告
UN38.3 Test Report

Page 1 of 11

样品名称 Sample Name	可充电锂离子电池 ARB-L14-800 Rechargeable Li-ion Battery ARB-L14-800		商标 Trademark	FENIX
			型号/规格 Model	ARB-L14-800 3.6V 800mAh 2.88Wh
委托单位 Applicant	名称 Name	深圳市朗恒电子有限公司 SHEN ZHEN LANG HENG ELECTRONIC CO.,LTD		
	地址 Address	深圳市宝安 33 区东方明工业城二栋八楼 8/F, 2nd Building, DongFangMing Industrial Center, 33rd District, Bao'an, Shenzhen		
生产厂家 Manufacturer	深圳市优能电源技术有限公司 SHENZHEN YOUR POWER TECHNOLOGY CO.,LTD.			
来样方式 Means of Receiving	委托方送样 Submitted by applicant		送样日期 Accepted Date	2015-06-15
检验日期 Test Date	2015-06-15~2015-07-06			
检验地点 Test Site	本检测室（电池室） DGM(Battery room, Beijing)			
检验项目 Test Items	高度模拟、温度试验、振动、冲击、外部短路、挤压、过度充电、强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Crush, Overcharge, Forced discharge			
检验依据 Test Method	联合国《关于危险货物运输的建议书-试验和标准手册》（第 5 版修正 1、修正 2）38.3 节 UN Recommendations on the Transport of Dangerous Goods Manual of Tests and Criteria ST/SG/AC.10/11/Rev.5/Amend.1 and Amend.2 Subsection 38.3			
样品状态 Appearance	黑色圆柱体电池，约 $\Phi 13.9\text{mm} \times 51.3\text{mm}$ 。 Black cylindrical battery, about $\Phi 13.9\text{mm} \times 51.3\text{mm}$.			
检验结论 Conclusion	根据联合国《关于危险货物运输的建议书-试验和标准手册》（第 5 版修正 1、修正 2）38.3 节的规定，该电池样品通过所有项目检测，符合该条款的性能要求。 The samples have passed all test items of UN Recommendations on the Transport of Dangerous Goods - Manual of Tests and Criteria ST/SG/AC.10/11/Rev.5/Amend.1 and Amend.2 Subsection 38.3. 检验单位(盖章) Test Lab(Stamp) 签发日期: 2015 年 07 月 09 日			
备注 Comment	可充电单电芯电池。 Rechargeable single cell battery.			

检测:
Tested by:

本因

审核:
Checked by:

1. 宋明

批准:
Approved by:

冯海

北京迪捷姆空运技术开发有限公司

Beijing DGM Air Transport Technology Co., Ltd.

UN38.3 测试报告

UN38.3 Test Report

Page 2 of 11

序号 No.	检验项目 Test Items	标准要求或标准条款 Standard Requirement or the Clause of Standard	检验结果 Test Result	单项评价 Conclusion	备注 Remark
1	高度模拟 Altitude Simulation	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.1	无泄漏、无排气、无解体、无破裂、无起火， 试验后的开路电压不低于试验前的 90%。 No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each battery after testing is not less than 90% of its voltage immediately prior to this procedure.	符合 Pass	/
2	温度试验 Thermal Test	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.2	无泄漏、无排气、无解体、无破裂、无起火， 试验后的开路电压不低于试验前的 90%。 No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each battery after testing is not less than 90% of its voltage immediately prior to this procedure.	符合 Pass	/
3	振动 Vibration	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.3	无泄漏、无排气、无解体、无破裂、无起火， 试验后的开路电压不低于试验前的 90%。 No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each battery after testing is not less than 90% of its voltage immediately prior to this procedure.	符合 Pass	/
4	冲击 Shock	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.4	无泄漏、无排气、无解体、无破裂、无起火， 试验后的开路电压不低于试验前的 90%。 No leakage, no venting, no disassembly, no rupture and no fire. The open circuit voltage of each battery after testing is not less than 90% of its voltage immediately prior to this procedure.	符合 Pass	/
5	外部短路 External Short Circuit	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.5	外壳温度不超过 170 °C，无解体、无破裂、无 起火。 External temperature does not exceed 170°C. No disassembly, no rupture and no fire.	符合 Pass	/
6	挤压 Crush	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.6	外壳温度不超过 170 °C，无解体、无起火。 External temperature does not exceed 170°C. No disassembly, no fire.	符合 Pass	/
7	过度充电 Overcharge	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.7	无解体、无起火。 No disassembly, no fire.	符合 Pass	/
8	强制放电 Forced Discharge	ST/SG/AC.10/11/Rev.5/Amend. 1 and Amend.2 Subsection 38.3 Test T.8	无解体、无起火。 No disassembly, no fire.	符合 Pass	/
以下空白 Blank below					

T.1: 高度模拟

T.1: Altitude Simulation

Page 3 of 11

Page 3 of 11

样品编号 Sample No.	样品状态 Sample Status	测试前 Pre-test		测试后 After-test				有无泄漏、排气、解体、破裂、起火 Leakage, Venting, Disassembly, Rupture, Fire(Yes/No)
		质量 Mass m ₁ (g)	开路电压 OCV V ₁ (V)	质量 Mass m ₂ (g)	质量损失 Mass Loss (%)	开路电压 OCV V ₂ (V)	剩余电压 Residual OCV (%)	
A1	首次完全充电 First cycle fully charged	20.539	4.194	20.537	0.010	4.192	99.95	No
A2	首次完全充电 First cycle fully charged	20.515	4.192	20.514	0.005	4.191	99.98	No
A3	首次完全充电 First cycle fully charged	20.360	4.192	20.360	0.000	4.191	99.98	No
A4	首次完全充电 First cycle fully charged	20.587	4.196	20.584	0.015	4.194	99.95	No
A5	首次完全充电 First cycle fully charged	20.560	4.193	20.557	0.015	4.191	99.95	No
A6	首次完全充电 First cycle fully charged	20.325	4.192	20.323	0.010	4.190	99.95	No
A7	首次完全充电 First cycle fully charged	20.518	4.192	20.516	0.010	4.190	99.95	No
A8	首次完全充电 First cycle fully charged	20.328	4.192	20.327	0.005	4.191	99.98	No
A9	首次完全充电 First cycle fully charged	20.467	4.193	20.466	0.005	4.190	99.93	No
A10	首次完全充电 First cycle fully charged	20.426	4.196	20.424	0.010	4.193	99.93	No

以下空白
Blank below

T.2: 温度试验

T.2: Thermal Test

Page 4 of 11

样品编号 Sample No.	样品状态 Sample Status	测试前 Pre-test		测试后 After-test				有无泄漏、排气、解体、破裂、起火 Leakage, Venting, Disassembly, Rupture, Fire(Yes/No)
		质量 Mass $m_1(g)$	开路电压 OCV $V_1(V)$	质量 Mass $m_2(g)$	质量损失 Mass Loss (%)	开路电压 OCV $V_2(V)$	剩余电压 Residual OCV (%)	
A1	首次完全充电 First cycle fully charged	20.537	4.192	20.534	0.015	4.115	98.16	No
A2	首次完全充电 First cycle fully charged	20.514	4.191	20.511	0.015	4.110	98.07	No
A3	首次完全充电 First cycle fully charged	20.360	4.191	20.360	0.000	4.117	98.23	No
A4	首次完全充电 First cycle fully charged	20.584	4.194	20.582	0.010	4.114	98.09	No
A5	首次完全充电 First cycle fully charged	20.557	4.191	20.555	0.010	4.111	98.09	No
A6	首次完全充电 First cycle fully charged	20.323	4.190	20.321	0.010	4.113	98.16	No
A7	首次完全充电 First cycle fully charged	20.516	4.190	20.514	0.010	4.110	98.09	No
A8	首次完全充电 First cycle fully charged	20.327	4.191	20.326	0.005	4.107	98.00	No
A9	首次完全充电 First cycle fully charged	20.466	4.190	20.464	0.010	4.114	98.19	No
A10	首次完全充电 First cycle fully charged	20.424	4.193	20.422	0.010	4.109	98.00	No

以下空白

Blank below

T.4: Shock

THE UNIVERSITY OF CHICAGO

Page 6 of 11

样品编号 Sample No.	样品状态 Sample Status	测试前 Pre-test		测试后 After-test				有无泄漏、排气、解体、破裂、起火 Leakage, Venting, Disassembly, Rupture, Fire(Yes/No)
		质量 Mass m ₁ (g)	开路电压 OCV V ₁ (V)	质量 Mass m ₂ (g)	质量损失 Mass Loss (%)	开路电压 OCV V ₂ (V)	剩余电压 Residual OCV (%)	
A1	首次完全充电 First cycle fully charged	20.534	4.115	20.534	0.000	4.115	100.00	No
A2	首次完全充电 First cycle fully charged	20.510	4.110	20.510	0.000	4.110	100.00	No
A3	首次完全充电 First cycle fully charged	20.360	4.117	20.360	0.000	4.117	100.00	No
A4	首次完全充电 First cycle fully charged	20.582	4.114	20.582	0.000	4.114	100.00	No
A5	首次完全充电 First cycle fully charged	20.555	4.110	20.555	0.000	4.110	100.00	No
A6	首次完全充电 First cycle fully charged	20.321	4.112	20.321	0.000	4.112	100.00	No
A7	首次完全充电 First cycle fully charged	20.512	4.110	20.512	0.000	4.110	100.00	No
A8	首次完全充电 First cycle fully charged	20.322	4.107	20.322	0.000	4.107	100.00	No
A9	首次完全充电 First cycle fully charged	20.464	4.114	20.464	0.000	4.114	100.00	No
A10	首次完全充电 First cycle fully charged	20.422	4.109	20.422	0.000	4.109	100.00	No

以下空白

Blank below

T.5: 外部短路**T.5: External Short Circuit**

Page 7 of 11

样品编号 Sample No	样品状态 Sample Status	样品表面最高温度(℃) Highest External Temperature/℃	有无解体、破裂、起火 Disassembly, Rupture, Fire(Yes/No)
A1	首次完全充电 First cycle fully charged	<57.0	No
A2	首次完全充电 First cycle fully charged	<57.0	No
A3	首次完全充电 First cycle fully charged	<57.0	No
A4	首次完全充电 First cycle fully charged	<57.0	No
A5	首次完全充电 First cycle fully charged	<57.0	No
A6	首次完全充电 First cycle fully charged	<57.0	No
A7	首次完全充电 First cycle fully charged	<57.0	No
A8	首次完全充电 First cycle fully charged	<57.0	No
A9	首次完全充电 First cycle fully charged	<57.0	No
A10	首次完全充电 First cycle fully charged	<57.0	No
以下空白 Blank below			

T.6: 挤压**T.6: Crush**

Page 8 of 11

样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度(℃) Highest External Temperature/℃	有无解体、起火 Disassembly, Fire(Yes/No)
B1	首次 50%容量 First cycle charged 50% rated capacity	37.6	No
B2	首次 50%容量 First cycle charged 50% rated capacity	36.0	No
B3	首次 50%容量 First cycle charged 50% rated capacity	35.2	No
B4	首次 50%容量 First cycle charged 50% rated capacity	31.8	No
B5	首次 50%容量 First cycle charged 50% rated capacity	33.7	No
以下空白 Blank below			

T.7: 过度充电**T.7: Overcharge**

Page 9 of 11

样品编号 Sample No.	样品状态 Sample Status	有无解体、起火 Disassembly, Fire(Yes/No)
C1	首次完全充电 First cycle fully charged	No
C2	首次完全充电 First cycle fully charged	No
C3	首次完全充电 First cycle fully charged	No
C4	首次完全充电 First cycle fully charged	No
C5	50 次完全充电 50 cycles fully charged	No
C6	50 次完全充电 50 cycles fully charged	No
C7	50 次完全充电 50 cycles fully charged	No
C8	50 次完全充电 50 cycles fully charged	No
以下空白 Blank below		

T.8: 强制放电

T.8: Forced Discharge


Page 10 of 11

样品编号 Sample No.	样品状态 Sample Status	有无解体、起火 Disassembly, Fire(Yes/No)
D1	首次完全放电 First cycle fully discharged	No
D2	首次完全放电 First cycle fully discharged	No
D3	首次完全放电 First cycle fully discharged	No
D4	首次完全放电 First cycle fully discharged	No
D5	首次完全放电 First cycle fully discharged	No
D6	首次完全放电 First cycle fully discharged	No
D7	首次完全放电 First cycle fully discharged	No
D8	首次完全放电 First cycle fully discharged	No
D9	首次完全放电 First cycle fully discharged	No
D10	首次完全放电 First cycle fully discharged	No
D11	50 次完全放电 50 cycles fully discharged	No
D12	50 次完全放电 50 cycles fully discharged	No
D13	50 次完全放电 50 cycles fully discharged	No
D14	50 次完全放电 50 cycles fully discharged	No
D15	50 次完全放电 50 cycles fully discharged	No
D16	50 次完全放电 50 cycles fully discharged	No
D17	50 次完全放电 50 cycles fully discharged	No
D18	50 次完全放电 50 cycles fully discharged	No
D19	50 次完全放电 50 cycles fully discharged	No
D20	50 次完全放电 50 cycles fully discharged	No
以下空白 Blank below		

UN38.3 测试报告

UN38.3 Test Report

Page 11 of 11

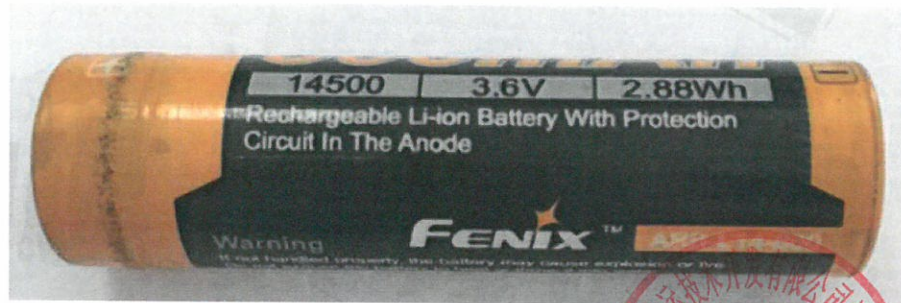

电池照片



北京迪捷姆空技术有限公司